



US 6,223,125 B1

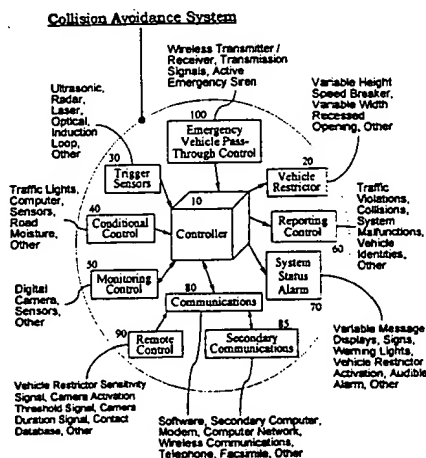
(12) **United States Patent
Hall**(10) **Patent No.:** US 6,223,125 B1
(45) **Date of Patent:** Apr. 24, 2001(54) **COLLISION AVOIDANCE SYSTEM**2333114 * 7/1999 (GB).
94/19544 9/1994 (WO).(75) **Inventor:** Brett O. Hall, 4206 Lazy Creek Dr.,
Marietta, GA (US) 30066*Primary Examiner*—Michael J. Zanelli
Assistant Examiner—Eric M Gibson(73) **Assignee:** Brett O. Hall, Marietta, GA (US)(57) **ABSTRACT**(*) **Notice:** Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.(21) **Appl. No.:** 09/478,485(22) **Filed:** Jan. 6, 2000**Related U.S. Application Data**(60) Provisional application No. 60/118,920, filed on Feb. 5,
1999.(51) **Int. Cl.⁷** G08G 1/00(52) **U.S. Cl.** 701/301; 701/117(58) **Field of Search** 701/301, 117,
701/118, 119; 340/928, 933, 936; 404/15(56) **References Cited****U.S. PATENT DOCUMENTS**

1,497,073	*	6/1924	Doyle	49/360
1,531,987	*	3/1925	Smith	246/300
2,729,805	*	1/1956	Struke	340/901
3,389,677	*	6/1968	Dunne	116/205
4,012,156		3/1977	Turner	404/15
4,023,017	*	5/1977	Ceseri	701/118
4,775,865	*	10/1988	Smith et al.	340/906
5,041,828		8/1991	Loeven	340/937
5,066,950		11/1991	Schweitzer	340/937
5,267,808	*	12/1993	Welford	404/11
5,319,366	*	6/1994	Mendelev	340/907
5,381,155	*	1/1995	Gerber	342/104
5,486,065		1/1996	James	404/15
5,509,753		4/1996	Thompson	404/6

(List continued on next page.)

FOREIGN PATENT DOCUMENTS2647132 11/1990 (FR).
2079356 1/1982 (GB).

The Collision Avoidance System prevents collisions between vehicles and vehicular collisions with pedestrians, trains, and stationary objects by monitoring, controlling, documenting, and reporting the speed and position of vehicles. The system guards against speeding violations, moving violations, and particular safety hazards by invoking a reduction of vehicle speed or by restricting vehicle movement to control its position. This is primarily accomplished with the activation of a controllable road perturbation. The system also monitors pedestrians, school bus loading/unloading, traffic density, trains, environmental conditions that may affect driving, and traffic control systems to determine the action to take for collision prevention. The capability to monitor various parameters that may indicate an impending collision or detect parameters that indicate that conditions are more favorable for a collision allows the system to monitor an entire traffic environment to anticipate and thus prevent those collisions. The system integrates and synchronizes with existing traffic control devices and systems to ensure that it reinforces the traffic laws and safety intent of the environment in which it is installed. Sensors detect the status of objects within the traffic environment including the location and speed of vehicles. A computer is used to determine if the vehicles are adhering to the traffic laws or other safety concerns. Alarms may accompany the system output to inform the operator what must be done to prevent a collision. Additional sensors and cameras document the identity of violating vehicles as well as any resulting collisions and report the information to predetermined authorities through a multiple-channel communications interface. Authorities can remotely alter system operations to compensate for changes in traffic or weather conditions that demands a change in driving behavior in order to maintain safe travel. The system also allows emergency vehicles to pass unimpeded through the traffic environment.

21 Claims, 12 Drawing Sheets

09892185-062601

U.S. PATENT DOCUMENTS

5,617,086 * 4/1997 Klashinsky et al. 340/907
5,673,039 * 9/1997 Pietzsch et al. 340/905
5,742,699 4/1998 Adkins 382/107
5,831,551 11/1998 Geduld 340/905

5,948,038 * 9/1999 Daly et al. 701/117
5,952,941 * 9/1999 Mardirossian 340/936
6,026,347 * 2/2000 Schuster 701/301

* cited by examiner

09892185-062601